




**Technical Specifications:**

Voltage:	3 Round Pin 250V AC 4,5 Round Pins 500V AC
Amp:	10A, 20A, 32A, 40A, 50A
Straight Plug Pin No:	3, 4, 5 Round Pins
Angled Plug Pin No:	4, 5 Round Pins
IP Rating:	66
Body Material:	Polycarbonate

**Pin Configurations:**

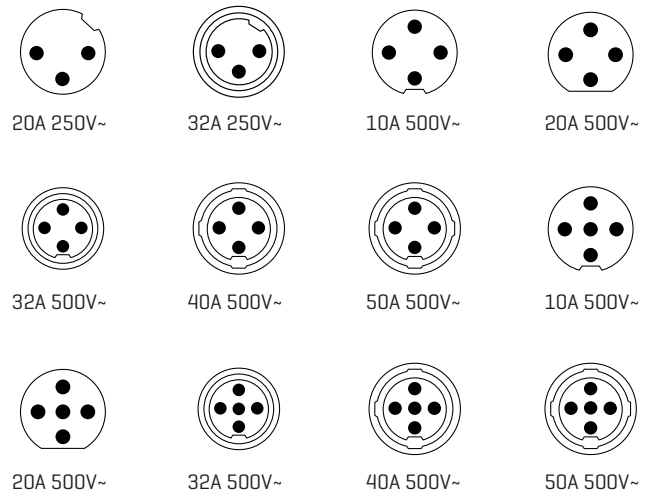

Pin & Volt	Cat No. Straight Plug	Cat No. Angle Plug	Current Rating [A]	Pin Config	Terminal Size [mm dia]	Maximum Conductor Size [mm <sup>2</sup> ]	Minimum Cable O.D [mm]	Maximum Cable O.D [mm]	Gland Nut Thread [mm]
3 Pin 250V~	C66P320		20	3 Round	4.1	10	7	16	M25 x 1.5
	C66P332		32	3 Round	4.1	10	7	16	M25 x 1.5
4 Pin 500V~	C66P410	C66PA410	10	4 Round	4.1	10	7	16	M25 x 1.5
	C66P420	C66PA420	20	4 Round	4.1	10	7	16	M25 x 1.5
	C66P432	C66PA432	32	4 Round	4.1	10	9	28	M32 x 1.5
5 Pin 500V~	C66P510	C66PA510	10	5 Round	4.1	10	7	16	M25 x 1.5
	C66P520	C66PA520	20	5 Round	4.1	10	7	16	M25 x 1.5
	C66P532	C66PA532	32	5 Round	4.1	10	9	28	M32 x 1.5

**Compliance:**

AS/NZS 3123  
With AS/NZS 3100 +A1 + A2 + A3

