



**Specifications:**


Rated current :	6A, 10A, 16A, 20A, 25A, 32A
Rated voltage:	230/240 VAC
Rated frequency:	50/60 Hz
Number of poles:	1P
Module size:	18mm
Curve type:	C-Type
Breaking capacity:	6000A
Rated residual operating current:	30mA
Optimum operating temperature:	-5°C to 40°C
Terminal Tightening torque:	1.2 N-m
Terminal Capacity [top]:	16 mm <sup>2</sup>
Terminal Capacity [bottom]:	16 mm <sup>2</sup>
Electro-mechanical endurance:	4000 cycles
Mounting:	35mm Din Rail
Length of Neutral Lead:	80mm
Suitable Busbar:	BUS-1P-18M, 131505, BUS-1U-12M, BUS-1U-18M

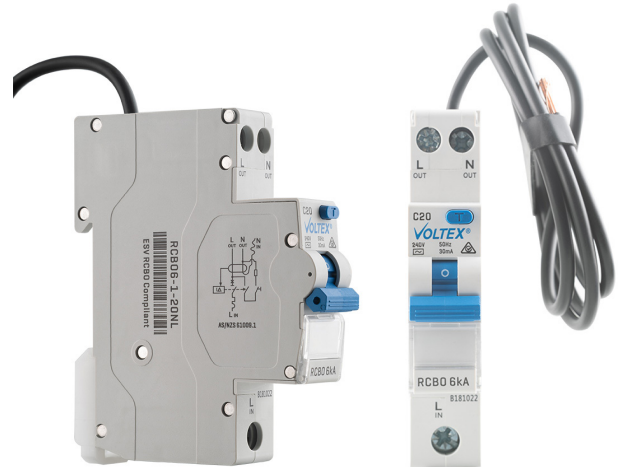

**The tripping characteristic curves**

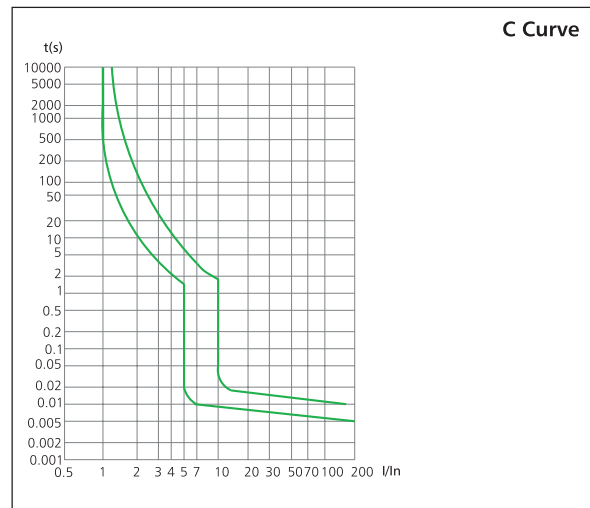

**Dimensions: (mm)**

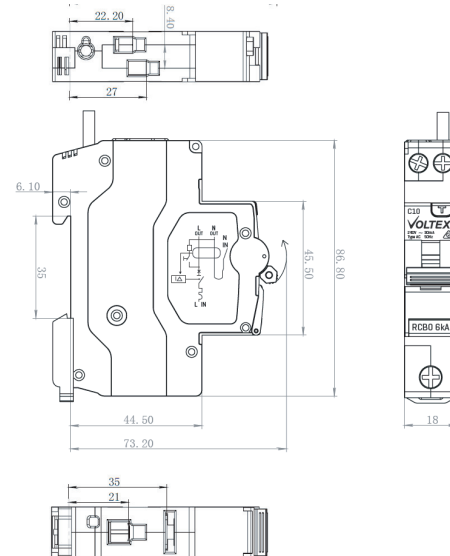

**Compliance**

AS/NZS 61009.1:2015  
 ESV Compliant

**Wiring Diagram**

