

Brushed Silver Frame





Black Frame

**Technical Specifications:**

Power	7W
Input Voltage	220-240V AC 50/60Hz
Driver	External - Dimmable [Trailing edge]
Class	IC-4 IC-F [New Zealand]
Light Source	SMD LED
Light Colour [Temperature]	Warm White [3000K], Natural White [Daylight 4000K] or Cool White [5600K]
Lumen Output	550-700 Lumens
Rated Lifespan	40,000 Hours
Beam Angle	90°
IP Rating	IP40 for the unit [IP54 for the LED cover]
Thermal Insulation Clearance	May abut the luminaire on the sides or cover the top [MCI & SCI = 0mm]
Building Elements Clearance	May abut the luminaire on the sides or the top [HCB & SCB = 0mm]
Flange Colour	White
Connection	External Driver, Supply Plug & 1.2m Flexible Cord

Ceiling Hole	90-95mm
Dimensions	10mm Height x 115mm Outer Diameter
Air Transfer Category	Closed
Accessories	IDL9T90-B IDL9T90-S [Silver and Black cover rings]

**Dimensions and Mounting:**

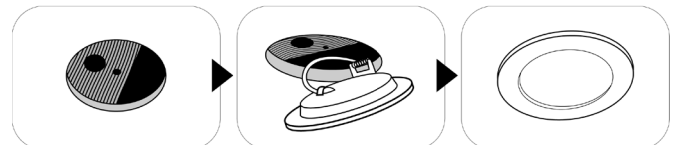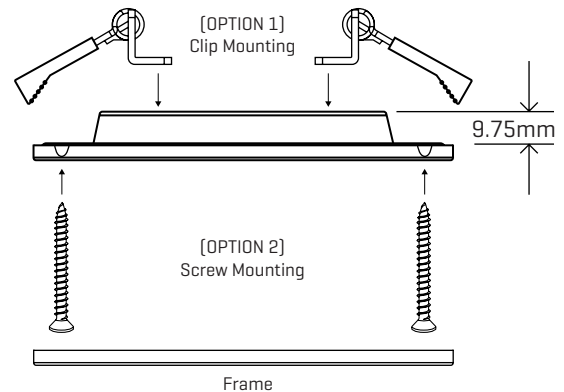

**Compliance:**

AS/NZS 60598.2.2. [incl. NZ Amendment A]  
 AS/NZS CISPR 15  
 IEC 61347.2.13

