

ARIA Trailing Edge Toggle Dimmer Mechanism 300W

ADM300TGV2, ADM300TGV2B, ADM300TGG



ADM300TGV2

White



ADM300TGV2B

Matt Black



ADM300TGG

Dark Grey


Technical Specifications

Nominal Supply	Voltage 230-240Vac 50Hz
Maximum Load	300W (with derating for multi-gang plate operation)
Minimum Load	3W
Dimming Operation	Trailing Edge
Compatible loads	Dimmable LED light fixtures (trailing edge) 240V incandescent/halogen 12V halogen c/w electronic transformer (trailing edge)
Non-Compatible Loads	Iron Core Transformers Non-Dimmable Loads Motor Loads
LED backlight for user	Yes - White or Blue (configurable)
Default user LED backlight colours	White
Function Mode LED	Yes - Red
Operating Temperature	-20C to +65C
Relative Humidity	<85%
Inbuilt switch type	Semi-conductor switching device. Circuit on the load side should always be considered as live
Over-temperature protection	Voltage maintained non-self-resetting thermal cut-out
Colours	ADM300TGV2: Aria Matte White ADM300TGV2B: Aria Matte Black ADM300TGG: Aria Matte Grey
Compliance	AS/NZS 60669.2.1 with AS/NZS 60669.1

Trailing edge LED dimmer which operates by pushing up to dim up, pushing down to dim down and push-in to switch on/off.

- Switch between the blue and white backlight
- Enable/disable the in-built push button switch
- Adjust the minimum and maximum dimming levels
- Clear the minimum and maximum dimming levels
- Disable/Enable the dimmer backlight
- Reset all functions to factory
- Toggle Power-up ON/OFF (Default: power up ON)

Dimensions

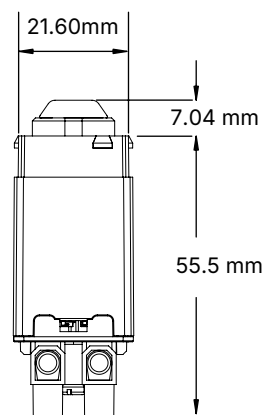

PDS20251105 - AT

ARIA

TECHNICAL SUPPORT

AU: 1300 722 275 NZ: 0800 55 66 33 sales@voltex.com

VOLTEX®