


**VOLTEX®**  
**PRODUCT DATA SHEET**

**Voltex ARMA Single Module  
 RCBO w/Flying Lead**




**TRIPPING CHARACTERISTIC CURVES**

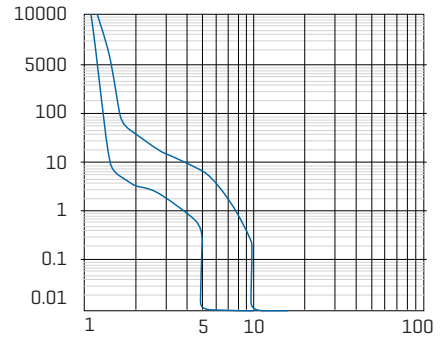

**TECHNICAL SPECIFICATIONS**

Rated Current	6A, 10A, 13A, 16A, 20A, 25A, 32A
Rated Voltage	230/240VAC
RCD Type	Type A
Number of Poles	1P+N [Switches A + N]
Module Size	1M
Curve Type	C-Curve
Breaking Capacity	6kA
Rated Residual Operating Current	30mA
Optimum Operating Temperature	-5°C to 40°C
Terminal Tightening Torque	1.2N/m
Terminal Capacity (top)	Up to 16 mm <sup>2</sup>
Terminal Capacity (bottom)	Up to 25 mm <sup>2</sup>
Length of Neutral Lead	800mm
Busbar	<b>1 Pole:</b> BUS.1P.18M, BUS.1U.12M, BUS.1U.18M  <b>3 Pole:</b> BUS.3U.4M, BUS.3U.6M, BUS.3U.18M, BUS.3P.6M
Compliance	AS/NZS 61009.1:2015 ESV Compliant
Warranty	25 Years

**WIRING DIAGRAM**

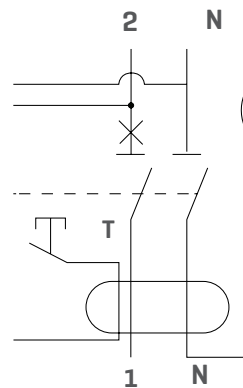

**DIMENSIONS**

