



2 POLE




4 POLE


TECHNICAL SPECIFICATIONS

Rated Current	40A, 63A
Rated Voltage	230VAC & 230/415VAC
Number of Poles	2P, 4P
Module Size	2M, 4M
RCD Type	Type A
Breaking Capacity	10kA
Rated Residual Operating Current	30mA
Optimum Operating Temperature	-5°C to 40°C
Terminal Tightening Torque	2.5N/m
Terminal Capacity (top)	Up to 35mm ²
Terminal Capacity (bottom)	Up to 35mm ²
Busbar	2 Pole: BUS.1P.18M, BUS.1U.12M, BUS.1U.18M 4 Pole: BUS.3U.4M, BUS.3U.6M, BUS.3U.18M, BUS.3P.6M
Compliance	AS/NZS 61008.1
Warranty	25 Years

WIRING DIAGRAM

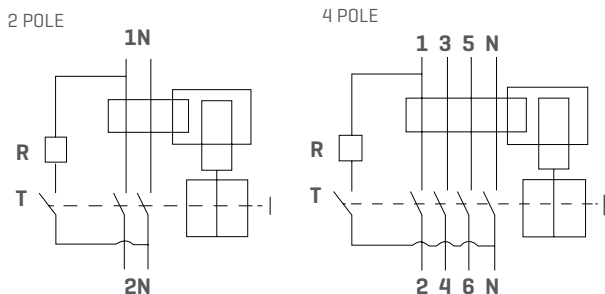

TRIPPING CHARACTERISTIC CURVES

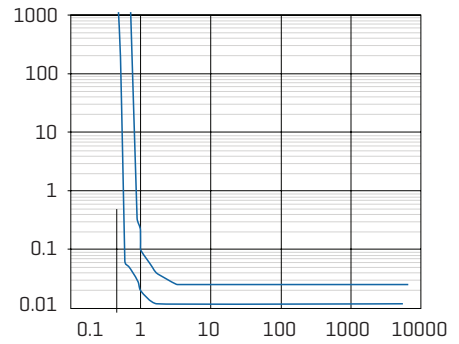

DIMENSIONS

