


Technical Specifications:

Voltage:	250V AC [3Pin] 500V AC [4, 5Pin]
Amp:	10A, 20A, 32A, 40A, 50A
Pin No:	3, 4, 5 Round Pins
IP Rating:	66
Body Material:	Polycarbonate

Pin Configurations:

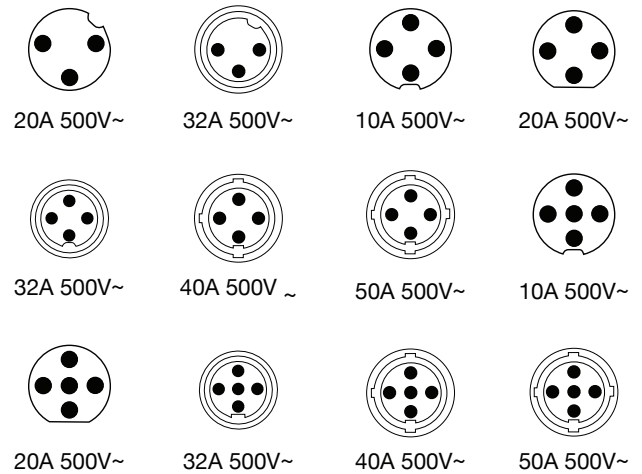

Compliance:

AS/NZS 3123

Pin & Volt	Cat No. Extension Sockets	Current Rating [A]	Pin Config	Terminal Size [mm dia]	Maximum Conduct Size [mm ²]	Minimum Cable Diameter [mm ²]	Maximum Cable Diameter [mm ²]	Gland Nut Thread [mm]
4 Pin 500V~	C66CSC410	10	4 Round	4.1	10	7	16	M25 x 1.5
	C66CSC420	20	4 Round	4.1	10	7	16	M25 x 1.5
	C66CSC432	32	4 Round	4.1	10	9	28	M32 x 1.5
5 Pin 500V~	C66CSC510	10	5 Round	4.1	10	7	16	M25 x 1.5
	C66CSC520	20	5 Round	4.1	10	7	16	M25 x 1.5
	C66CSC532	32	5 Round	4.1	10	9	28	M32 x 1.5

