



C66SW332RW FRONT





C66SW332RW BACK

Specifications

Cover Material	Polycarbonate Blend
IP Rating	IP66
Optimum Operating temperature	-25 to +50C
UV Resistant	Yes
Chemical Resistance	Suitable for environments with milder chemicals/oils
Cable entry in enclosure	25mmx2 and 32mmx1
Max Terminal size for cable	25mm ²
Appropriate entry reducers included	

Dimensions

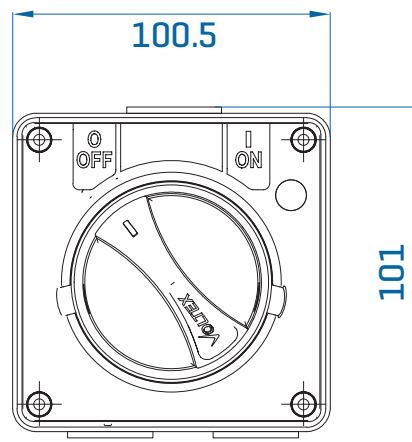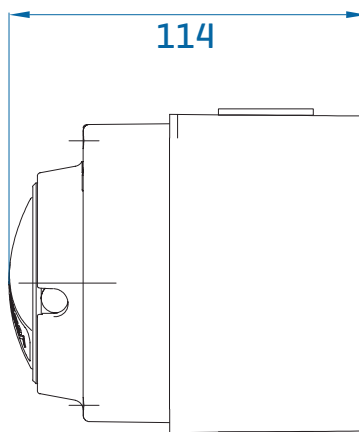

Product Code	Type	Amp	Volts	M Rating	AC Rating
C66SW220RW	2 Pole	20	500	100	AC22A
C66SW332RW	3 Pole	32	500	100	AC22A
C66SW363RW	3 Pole	63	500	130	AC22A

Compliance

AS/NZS IEC 60947.3
AS/NZS 3133

