



CPP2HUSBC

CPP2HUSBCB

**Technical Specifications:**

Number of Switching Poles Per Socket:	1 [Active Only]
Rated Voltage:	250 V AC
Rated current:	10A
Switching Mechanism:	Rocker Switch Mechanism
Connection type:	3 x Screw Terminals
Terminal Size:	26mm <sup>2</sup> [accommodates 4 x 2.5mm <sup>2</sup> cables]
Housing Material:	Polycarbonate
Contact Material:	Silver Alloy
Color:	White/Matte Black
USB Ports:	1x C-type port, 5Vdc 3A, 9Vdc 2A, 12Vdc 1.5A 1x A-type port, 5Vdc 2.1A

**Dimensions:**

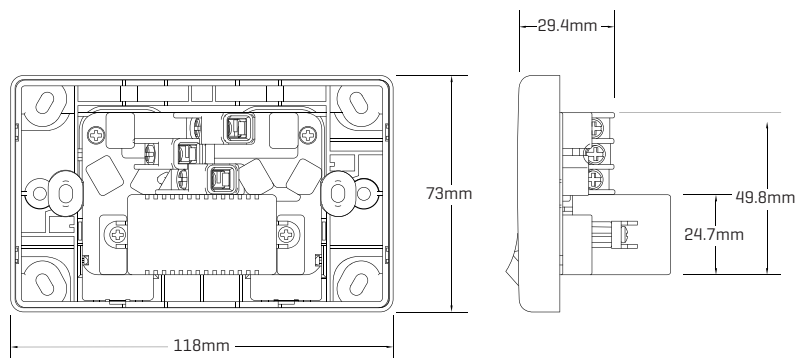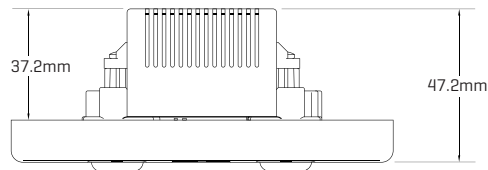

**Compliance:**

AS/NZS 3112; AS/NZS 3100  
AS/NZS 61558.2.16+ A1 +A2 +A3  
AS/NZS 61558.1.16+ A1 +A2

*Classic*

