


Classic USB Double Power Outlet 250V 10A

CPP2HUSBC, CPP2HUSBCB



CPP2HUSBC
White




CPP2HUSBCB
Matte black

Technical Specifications

Number of switching poles per socket	1 (Active only)
Rated voltage	250 V AC
Rated current	10A
Switching mechanism	Rocker switch mechanism
Connection type	3 x screw terminals
Terminal size	26mm ² (accommodates 4 x 2.5mm ² cables)
Housing material	Polycarbonate
Contact material	Silver alloy
Colour	White / Matte black
USB ports	1x C-type port: 5Vdc 3A, 9Vdc 2A, 12Vdc 1.5A 1x A-type port: 5Vdc 2.1A
Compliance	AS/NZS 3112; AS/NZS 3100 AS/NZS 61558.2.16 +A1 +A2 +A3 AS/NZS 61558.1.16 +A1 +A2

Dimensions

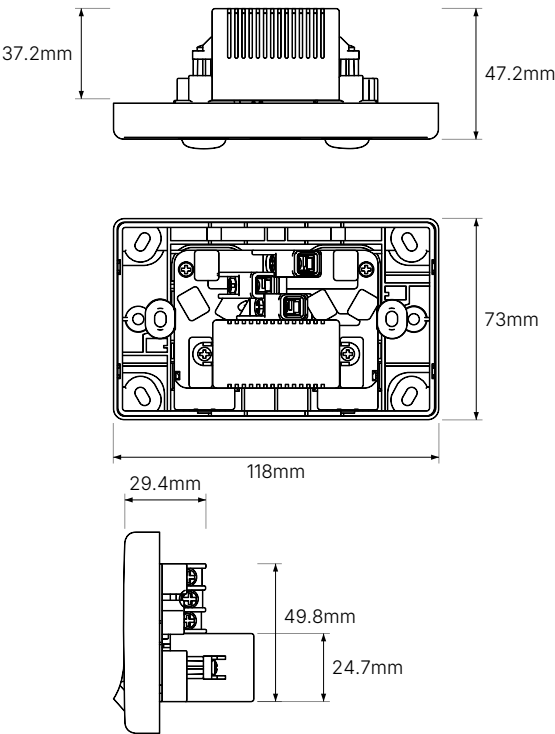

PD20227108 - SL