



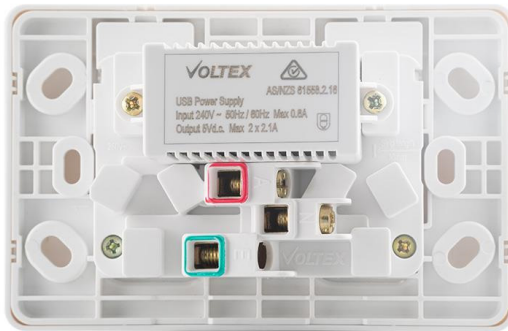

CPP2HUSB

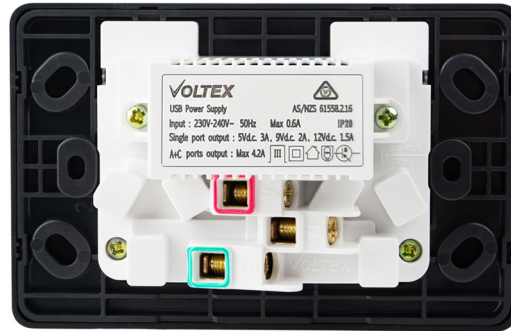


CPP2HUSBB

Technical Specifications:

Number of USB sockets:	2
Number of sockets:	2
Number of switching poles per socket:	1 [Active Only]
Rated Voltage:	250 V AC
Rated current:	10A
Terminal Size:	16mm ² [accommodates 4 x 2.5mm ² cables]
Switching Mechanism:	Rocker Switch Mechanism
Connection type:	3 x Screw Terminals
Housing Material:	Polycarbonate
Contact Material:	Silver plated Copper
USB Ports:	Matte Black, White

Dimensions:

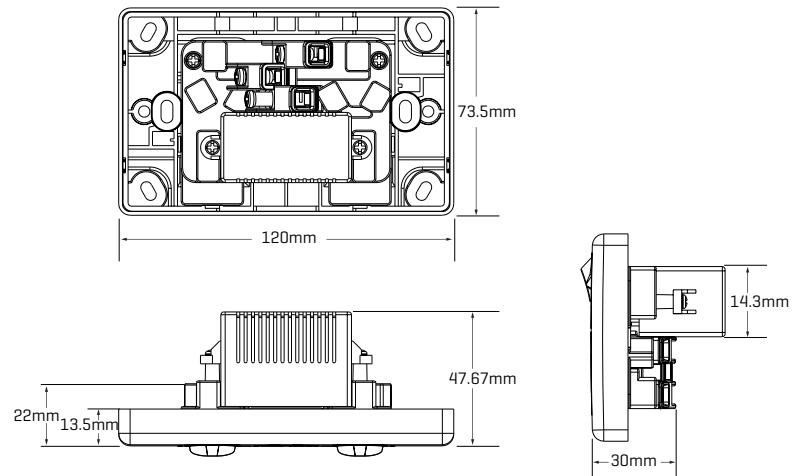

Compliance:

AS/ NZS 3112:2011
AS/ NZS 3100:2009
AS/NZS 61558.2.16:2010 + A1 + A2 + A3
AS/NZS 61558.1.16:2008 + A1 + A2

Classic

