




TECHNICAL SPECIFICATIONS

Number of switching poles per socket	1 (Active only)
Rated Voltage	250 V AC
Rated current	10A / 15A
Connection type	3 Cage Terminals with Captured Screws
Terminal Size	16mm ² [accommodates 4 x 2.5mm ² cables]
Housing Material	Polycarbonate
Contact Material	Silver Alloy
Track Material	Copper Alloy
Colour	White, Matte Black
Switch Mechanism	CSM16 16AX [See CSM16 Specification sheet for details]
Accessories	Stainless Steel Cover Plates SBC Shrouds VPC Paint Cover
Compliance	AS/ NZS 3112 AS/ NZS 3100
Safety Shutters	Yes
Warranty	25 Years

DIMENSIONS

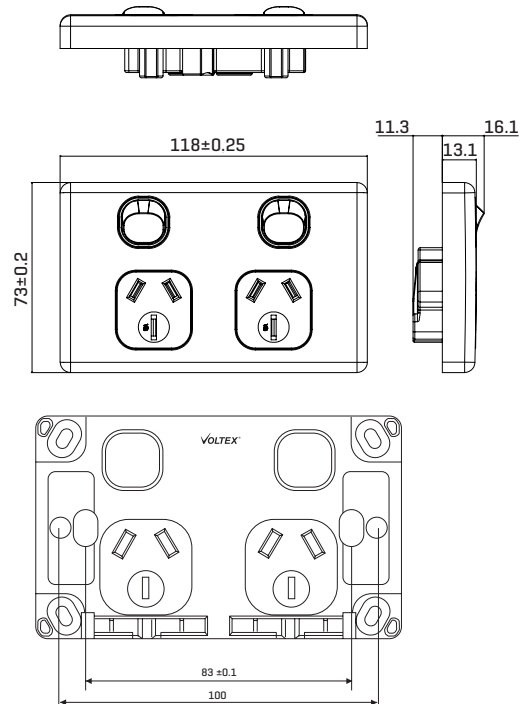

Classic

