




**Specifications**

**General**


Room temperature range	-25 °C / +40 °C
Maximum operating voltage	1000VAC / 1500VDC
Material and Colour [Door]	PSS-W: ABS White RAL 9003. UV Stabilized. PSS: ABS Smoky grey/blue. UV Stabilized.
Material and Colour [Front Panel]	ABS White RAL 9003. UV Stabilized.
Material and Colour [Base]	PS [V0] Grey RAL 7035.
Accessories included	Pole fillers, module identification label, and circuit labelling set. [Busbars, bar protection caps and switchboard lock sold separately]

**Dimensions**

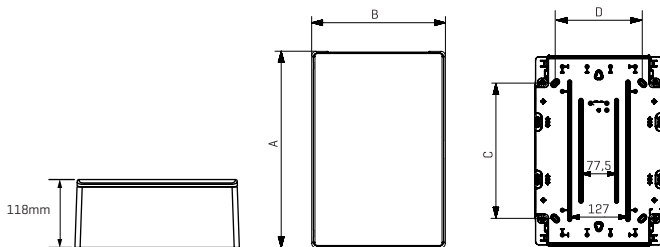

Model	A [mm]	B [mm]	C [mm]	D [mm]
PSS12	250	284	130	190
PSS18	254	392	130	296
PSS24	418	284	296	190
PSS36	544	284	420	190

**Neutral/Earth Bar**

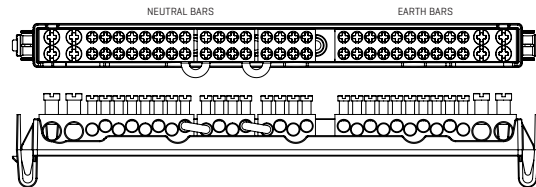

Compliance	AS/NZS 60998.2.1:2012
Rated current	125A
Supply terminals	7.8mm [accepts 35mm² cable]
Other terminals	5.2mm [accepts 16mm² cable]
Screw details	PH2/Flat screwheads. Clear passivated steel. Rounded ends. Captive in bar. Wound out from production.

PRODUCT	SUPPLIED NEUTRAL BARS	SUPPLIED EARTH BARS
PSS12	[2x{35mm²}+8x{16mm²}] + 2x{4x{16mm²}}	2x{35mm²}+10x{16mm²}
PSS18	[2x{35mm²}+8x{16mm²}] + 3x{4x{16mm²}}	2x{35mm²}+16x{16mm²}
PSS24	2 x [(2x{35mm²}+8x{16mm²}) + 2x{4x{16mm²}}]	2 x [2x{35mm²}+10x{16mm²}]
PSS36	2 x [(2x{35mm²}+8x{16mm²}) + 3x{4x{16mm²}}]	2 x [2x{35mm²}+16x{16mm²}]

Enclosure	
Compliance	AS 62208-2006
Degree of Protection	IP40
Resistance to impact	IK08
Auto-extinguishing degree	V-0 [AS/NZS 60695.11.10]

