




Made in Australia

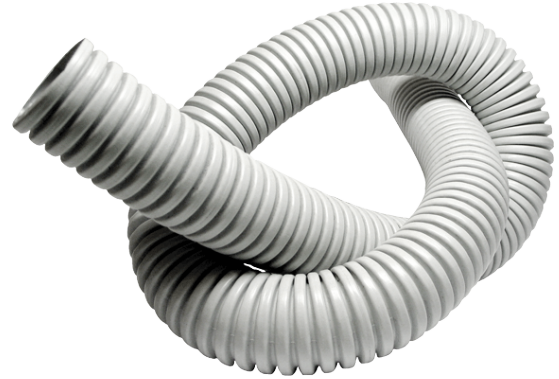

Technical Specifications:

Use:	High UV Exposure Prefabricated Buildings Oil/Fuel Refineries Underground Concrete Industrial Seaside
Sizes:	25mm
Material:	PVC Heavy Metal Free (RoHS) Lead Free Self-Extinguishing Flame Retardant
Colour:	Grey and Black
Resistance to UV:	Extreme UV Exposure
Rating:	Heavy Duty
Temperature Range:	-5°C to +60°C
Resistance to Compression:	Minimum 1250 N / 5cm
Resistance to Impact:	Minimum 6 Joule
Ingress Protection (IP):	IP66
Resistance to Flame Propagation:	Non-flame Propagating
Dielectric Strength:	Electro-insulating Characteristics

Compliance:

B.E.P Certified
Green Star Certified
AS/NZS 2053.5

