




Built with high resistance materials, Voltex IP66 switches comply with industry standards. The cover is made of highly durable polycarbonate plastic. They can be padlocked in the off position.

| Product Code | Type   | Amp | Volts | M Rating | AC Rating |
|--------------|--------|-----|-------|----------|-----------|
| C66SW220     | 2 Pole | 20  | 500   | 100      | AC22A     |
| C66SW332     | 3 Pole | 32  | 500   | 100      | AC22A     |
| C66SW363     | 3 Pole | 63  | 500   | 130      | AC22A     |

**Dimensions:**

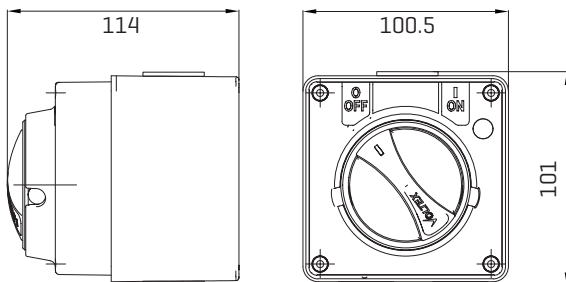

**Specifications:**

|                                     |  |
|-------------------------------------|--|
| Cover Material:                     | Polycarbonate  |
| IP rating:                          | IP66   |
| Optimum Operating temperature:      | -25 to +50C  |
| UV Resistant:                       | Yes  |
| Chemical resistant:                 | Low - Not suitable for environments with chemicals/ oils |
| Cable entry in enclosure:           | 25mm x 2 and 32mm x 1                                    |
| Max Terminal size for cable:        | 25mm <sup>2</sup>  |
| Appropriate entry reducers included |  |

**Compliance:**

AS/NZS IEC 60947.3  
AS/NZS 3133

