

- The Timer senses whether connected lights are ON or OFF and controls a connected fan based on the status of the lights
- No Neutral connection required
- Maximum Load 1A, Minimum Load 2.5W

Technical Specifications:

Supply	220 – 240V, 50Hz	Dimensions	39 x 41 x 12 mm
Max Load	1A [all load types]	Weight	20g
Min Load	2.5W	Ingress protection	IP30
Compatible Load Types	Resistive loads	Wire length	110 mm
	Inductive load [contactor coil]	Ambient Operating Temperature	0 to 50°C
	Tungsten filament lamp load	Ambient Storage Temperature	-10 to 70°C
	Externally ballasted lamp load [LED, CFL or Fluorescent]	Humidity	0% to 95% RH non-condensing
	Self-ballasted lamp load [LEDi or CFLi]	Fault Protection	Open circuit
Small motor load – M.1 [exhaust fan typical]	Short circuit		
Fan Turn-On Delay	3 seconds [default]	Overload	
	1 minute	Over temperature	
	3 minutes	Material	Flame retardant polycarbonate
Fan Turn-Off Delay [run-on time]	5 minutes		
	15 minutes [default]		
	30 minutes		
Switch Input type	Toggle ON/OFF		
Load Switching type	Semiconductor switching device		


Compliance

CISPR15, AS/NZS 61347.2.11



Operation

- When the connected lights are turned ON, the timer will wait for the fan ON-delay period, then turn the fan ON (default 3 seconds)
- When the connected lights are turned OFF, the timer will operate the fan OFF-delay period, then turn the fan OFF (default 15 minutes)

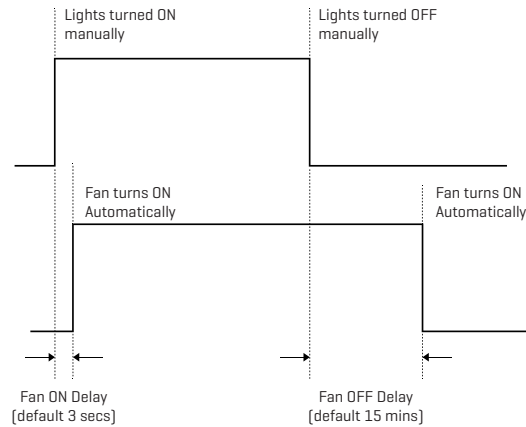

Installation with modular switch mechanism

- This product must be used in conjunction with a standard switch plate and modular switch.

