

LED Flood Light IP66

FLB-CW/50W, FLB-CW/72W, FLB-CW/120W, FLB-CW/200W







50W

72W

120W & 200W

A powerful LED floodlight which is designed for area lighting. New design with an symmetric distribution curve with high efficiency. Made of a aluminum die-casting body, aluminum bracket and stainless screws, providing a good corrision resistance.

IP66 rated making it suitable for Billboard lighting, Garden/Building decoration, Parking area, etc.

NOTE: not suitable for MARINE applications

Technical Data:


Driver	Housed internally		
Light Source	Cree JK2835 9-V		
Light Colour/ Temperature	Cool White (± 5700K)		
Beam Angle	120°		
Life Span	>50,000 hours		
IP Rating	IP66		
Housing Colour	Black		
Tempered Glass	Semi-frosted		
Working Temperature	-20C to +50C		
Flex and plug	Yes		
Flex length	1.4m		

LED Flood Light IP66								
Product Code	Power (No of Chips)	Н	W	D	Lumens	Efficiency	Net weight	
FLB-CW/50W	50W	330mm	225mm	55mm	5000-5500 Lm	100-110 lm/W	3.1kg	
FLB-CW/72W	72W	372mm	250mm	75mm	7000-7900 Lm	100-110 lm/W	4.8kg	
FLB-CW/120W	120W	450mm	340mm	75mm	12000-13000 Lm	100-110 lm/W	5.8kg	
FLB-CW/200W	200W	450mm	340mm	90mm	21000-22400 Lm	105-115 lm/W	7.8kg	




LED Flood Light IP66

FLB-CW/50W, FLB-CW/72W, FLB-CW/120W, FLB-CW/200W

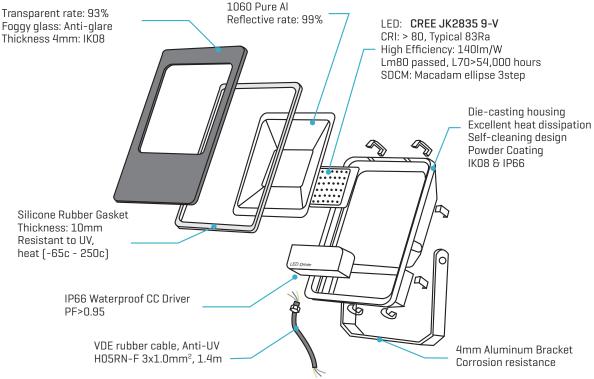

DImensions:



- · New Design gives higher lumens per watt with better light spread
- · High performance coating for rust prevention with 7 Year warranty
- · Attract less insects than incandescent lighting less cleaning and maintenance!
- · Can be switched on and off repeatedly, Ideal for use with Motion Sensors.
- · No warm up time needed to produce full light.
- · High performance chips and drivers with 7 Year Warranty

