



CL12T275 and CL18T275



CL25T350

**Features:**


|                         |   |
|-------------------------|---|
| Rated Wattages          | CL12T275 12W<br>CL18T275 18W<br>CL25T350 25W  |
| Input Voltage           | 220-240Vac  |
| Efficiency              | 80%   |
| CCT                     | 3CCT: 3000K, 4000K and 5700K  |
| CCT Selection           | DIP switch  |
| CRI                     | Ra>80   |
| Beam Angle              | 120°  |
| LED Driver              | Compatible with most trailing edge dimmers<br>Voltex DM300S or DM250X dimmers recommended |
| Electrical Class        | Class II  |
| IP Rating               | IP54  |
| IK Rating               | IK08  |
| Diffuser material       | Polycarbonate   |
| Body material           | Polycarbonate   |
| Lifetime                | 50,000 hours  |
| Operating Temp          | -20°C - 45°C  |
| Storage Temp            | -20°C - 65°C  |
| Double insulated        | Yes   |
| Standards complied with | AS/NZS 60598.2.2.<br>[incl. NZ Amendment A]<br>AS/NZS IEC 61347.2.13<br>AS/NZS CISPR 15   |

**Light Output:**

| CL12T275     | CL18T275     | CL25T350     |
|--------------|--------------|--------------|
| 3000K 1050lm | 3000K 1620lm | 3000K 2250lm |
| 4000K 1300lm | 4000K 1900lm | 4000K 2650lm |
| 5700K 1200lm | 5700K 1800lm | 5700K 2400lm |

**Dimensions:**

**12W and 18W Models**

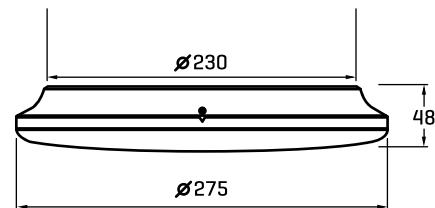

**25W Model**

