




PLEASE NOTE: NOT SUITABLE FOR SWITCHING 240V. USE FOR SWITCHING UP TO 24V ONLY

SELV Push Button typically used as a momentary switch interface to electronic control products/systems which requires an SELV dry contact input.

- Switch contact rating: 24V dc 20mA maximum
- Integrated Blue and White LED backlight (Note: illuminating the Blue or white LED backlight is optional and requires a separate 5 – 24 V dc power supply [not included])
- When the blue or white LEDs are connected to 5-24 V dc, the backlight is permanently illuminated
- Fits Voltex and other brands which use the standard wall plate aperture.
- Ribbon cable length 140mm [included striped ends]


RIBBON CABLE CONNECTIONS

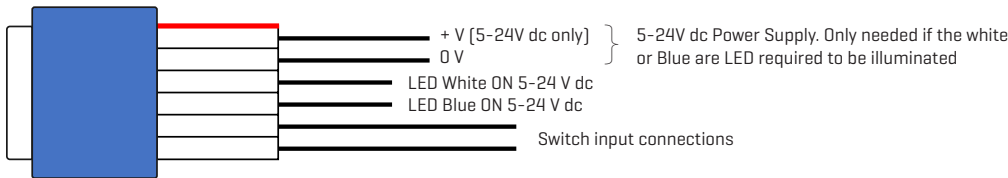

TYPICAL CONNECTION - LED not required to be illuminated



TYPICAL CONNECTION - White LED backlight illuminated

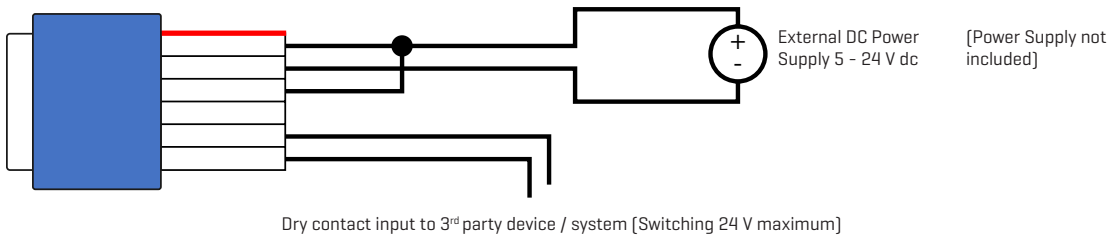

TYPICAL CONNECTION - Blue LED backlight illuminated

