



Specifications

Rated current :	6A, 10A, 13A, 16A, 20A, 25A, 32A, 40A
Rated voltage:	230/240 VAC
Rated frequency:	50 Hz
Number of poles:	1P
Module size:	18mm
Curve type:	C-Type
Breaking capacity:	Icn 6000A (IΔm 500A)
Rated residual operating current:	30mA
Optimum operating temperature:	-5°C to 40°C
Terminal Tightening torque:	1.2 N-m
Terminal Capacity [top]:	16 mm ²
Terminal Capacity [bottom]:	16 mm ²
Electro-mechanical endurance:	4000 cycles
Mounting:	35mm Din Rail
Length of Neutral Lead:	800mm
Suitable Busbar:	1 Pole: BUS-1P-18M, BUS-1U-12M, BUS-1U-18M, 3 Pole: BUS-3U-4M, BUS-3U-6M, BUS-3U-18M, BUS-3P-6M

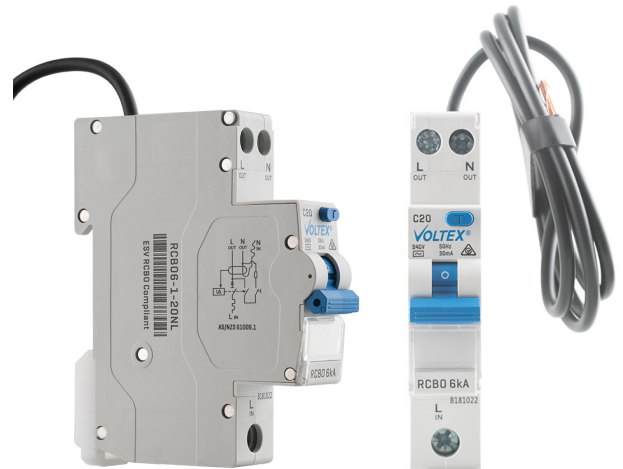


The tripping characteristic curves

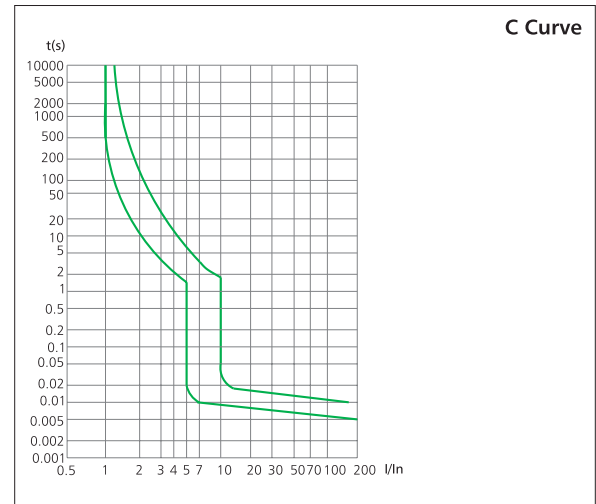

Compliance

AS/NZS 61009.1:2015
ESV Compliant

Wiring Diagram



Dimensions: [mm]

