




Front Side

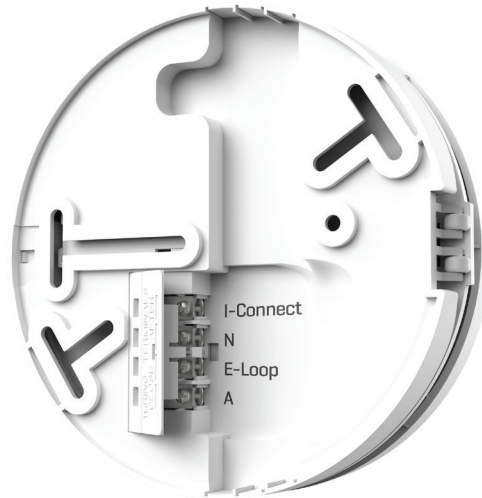

Back Side

Technical Specifications:

Sensing Type:	Photoelectric (Type A - contains no radioactive material)
Power Supply:	220-240V AC 50Hz Replaceable DC 3V battery
Terminal:	Accommodates 2x 2.5mm ²
Interconnectivity:	Hard Wired
Battery life:	10 year backup Lithium
Wireless Option:	Wireless Module SASWM
Interconnection:	Maximum 24 paired alarms Max wiring length between first and last alarm: 150 m
Size:	Φ135mm x 45mm
Temp range:	0°C - 45°C
Max Humidity:	5-95% RH
Alarm Signal Pattern:	ISO 8201
Alarm Volume:	85dB at 3m
Hush Time:	10 mins

Compliance

AS 3786:2014

Certification

CSIRO Verification Service

