


SLPP2HUSBC

SLPP2HUSBCB

Technical Specifications:

Rated Voltage:	250 V AC
Rated current:	10A
USB Ports:	1x C-type port, 5Vdc 3A, 9Vdc 2A, 12Vdc 1.5A 1x A-type port, 5Vdc 2.1A
Switching Poles:	Active Only
Connection type:	3 x Screw Terminals
Terminal Size:	26mm ² [accommodates 4 x 2.5mm ² cables]
Housing Material:	Polycarbonate
Contact Material:	Silver Alloy
Cut-Out:	[98mm x 55mm]
Color:	White / Matte Black

Dimensions:

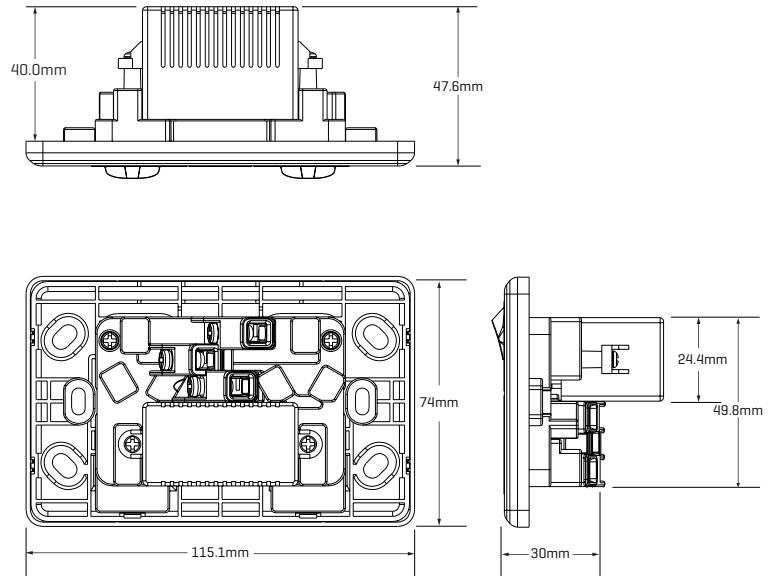

Compliance:

AS/NZS 3112; AS/NZS 3100
AS/NZS 61558.2.16+ A1 +A2 +A3
AS/NZS 61558.1.16+ A1 +A2

Shadowline

