





**Technical Specifications:**

Plate Thickness:	4.6mm [SLPP2HXWM and USB Version is 8mm, see individual specification sheets]
Number of switching poles per socket:	1 [Active only]
Rated Voltage:	250 V AC
Rated current:	10A/ 15A
Connection type:	3 x Screw Terminals
Terminal Size:	16mm <sup>2</sup> [accommodates 4 x 2.5mm <sup>2</sup> cables]
Housing Material:	Polycarbonate
Contact Material:	Silver plated Copper
Color:	Black /White
Accessories:	Stainless Steel Cover Plates SBC Shrouds VPCS Paint Cover [Suits Double Outlet only]

**Dimensions:**

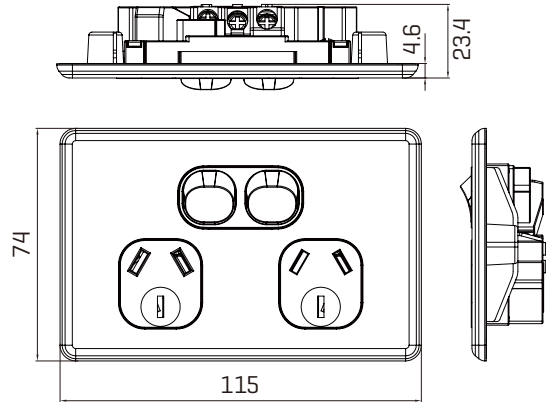

**Cut-out template:**

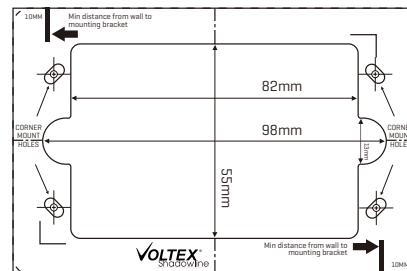

**Compliance:**

AS/ NZS 3112  
AS/ NZS 3100

Shadowline

