




Technical Specifications:

Use	Outdoor, high UV exposure areas
Sizes OD	20mm, 25mm
Sizes ID	14.1mm, 18.3mm
Material	PVC SPVC [outer sheath]
Resistance to flame propagation	Non-flame propagating
Dielectric Strength	Electro-insulating Characteristics
IP Rating	IP65
Colour	Grey
Resistance to UV	Protection against UV radiation with minimal yellowing - 'T' rated
Rating	Medium Duty
Temperature Range	-25°C to +60°C
Resistance to Compression	Minimum 750 N / 5cm
Resistance to Impact	Minimum 2 Joule

Structure:

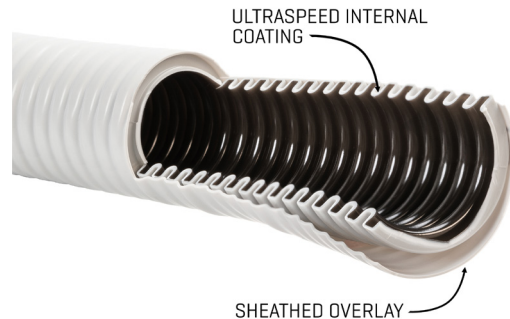

Compliance:

AS/NZS 2053.1
AS/NZS 2053.5
EN 61386-22

