
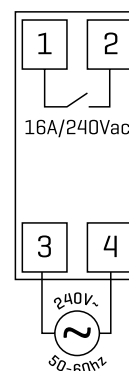


- 7 different programs, one for each day of the week
- Automatic summertime update [if required]
- Backup battery for maintaining the date and time without mains power
- Replaceable Lithium backup battery [4-year battery life]
- Low battery indicator
- Manual override [temporary or permanent]
- Backlight with auto power off

Specifications:

Power supply	240Vac 50Hz
Relay capacity	16A @ 240Vac
Loads	Incandescent 2000 W Fluorescent 250 VA Low voltage halogen 1000 VA Halogen [240 V] 2000 W CFL 200 VA LED 500 VA
Battery life/type	4 years/Lithium CR-1632
Programming resolution	30 minutes
Programming	Weekly [7 programs] 7 different programs, one for each day of the week. Option to set 'Daily mode' [same program runs each day]
Resolution of programming	30 minutes
Operating accuracy	± 1 second/day at 25°C
Operating temperature	-20 to +50°C
Storage temperature	-10 to +70 °C
Operating humidity	RH 20 to 90 % non-condensing
Housing	1 DIN module
Protection degree	IP20
Quiescent Power	1W
Terminal size	1 x 4mm ² cable maximum

Dimensions and Wiring:

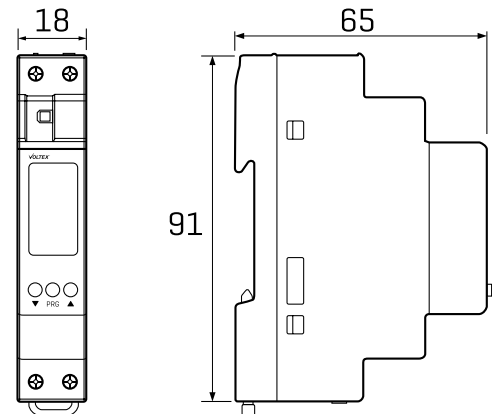

Wiring Diagram

