

Twin Head Floodlight

OFL30W AND OFL30B



OFL30W
White






OFL30B
Black



Technical Specifications

Operating Voltage	230 - 240 V AC
Frequency	50Hz
Driver	Built in driver
Lighting output wattage	30W / 15W
Insulation	Double Insulated
Dimmable	No
Terminal size	Suitable for 3 × 2.5mm ² cables
Optimum Mounting height	2.5m - 3m
Mounting Orientation	- Vertical (wall) - Horizontal (under eave)
Material	PVC (UV stabilised)
Colour	White, Black
Protection Rating	IP55
Operating Temperature	-10°C to +50°C
Lighting Power	Switch selectable 2 × 15W (high output) 2 × 7.5W (low output)
Lumen Output	2 × 15W: 3500 lm (total) 2 × 7.5W: 1900 lm (total)
Colour Temperature	Switch selectable 3000K 4000K 5000K
Colour Rendering Index	Ra > 80
Compliance	AS/NZS 60598.2.5:2018 [with AS/NZS 60598.1:2017 +A1 +A2] AS 61347.2.13:2018 [with AS/NZS 61347.1:2016 +A1] AS/NZS CISPR 15
Warranty	7 Years

Dimensions

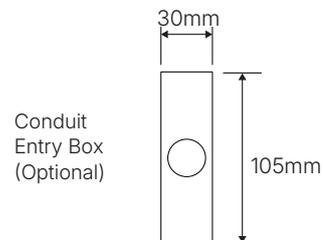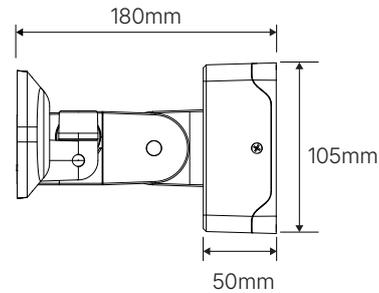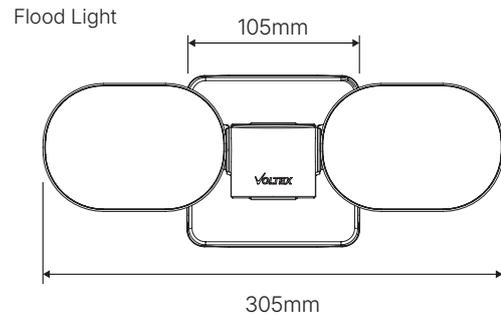

P.D.S.2026.0128 - ART