

# ORIN™ Twin Floodlight

OFL30W AND OFL30B



**OFL30W**  
White






**OFL30B**  
Black



## Technical Specifications

<b>Operating Voltage</b>	230 - 240 V AC
<b>Frequency</b>	50Hz
<b>Driver</b>	Built in driver
<b>Lighting output wattage</b>	30W / 15W
<b>Insulation</b>	Double Insulated
<b>Dimmable</b>	No
<b>Terminal size</b>	Suitable for 3 × 2.5mm <sup>2</sup> cables
<b>Optimum Mounting height</b>	2.5m - 3m
<b>Mounting Orientation</b>	- Vertical (wall) - Horizontal (under eave)
<b>Material</b>	PVC (UV stabilised)
<b>Colour</b>	White, Black
<b>Protection Rating</b>	IP55
<b>Operating Temperature</b>	-10°C to +50°C
<b>Lighting Power</b>	Switch selectable 2 × 15W (high output) 2 × 7.5W (low output)
<b>Lumen Output</b>	2 × 15W: 3500 lm (total) 2 × 7.5W: 1900 lm (total)
<b>Colour Temperature</b>	Switch selectable 3000K 4000K 5000K
<b>Colour Rendering Index</b>	Ra > 80
<b>Compliance</b>	AS/NZS 60598.2.5:2018 [with AS/NZS 60598.1:2017 +A1 +A2] AS 61347.2.13:2018 [with AS/NZS 61347.1:2016 +A1] AS/NZS CISPR 15
<b>Warranty</b>	7 Years

## Dimensions

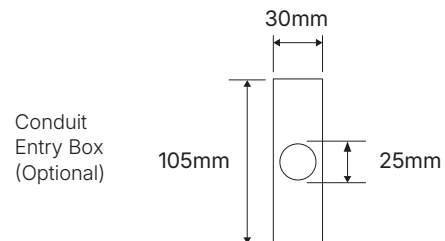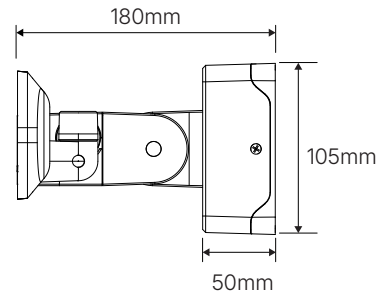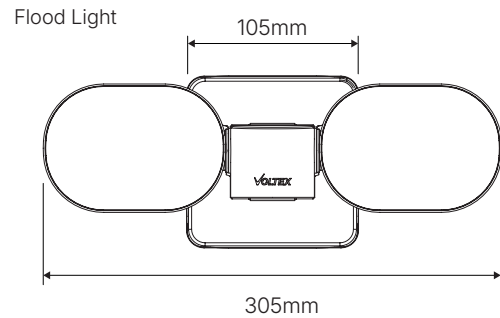

P.D.S.20.260.430 - ART