


Technical Specifications:

Input Voltage:	200-260 VAC 50/60Hz
Maintained Battery Life:	3 Hours
Opal diffuser material:	UV Stabilized Polycarbonate [PC] Opaque White
Body material:	Polycarbonate [PC] Grey
Fireproof grade:	V-0
Input Power [Watts]:	42
Clips & Mounting Brackets:	304 Stainless Steel
Terminal Block:	3 Poles Screw Terminal 6mm ² capacity
Driver Efficiency:	>85.1
Driver Brand:	OSRAM® OPTOTRONIC
LED Brand:	LG® , LM-80
LED Type:	SMD2835
LED Qty [Pcs]:	75
CCT - Colour Temperature [Kelvin]:	5000K
CRI [Colour Rendering Index]:	>80
Typical Lumens:	[+/-5%] 3700Lm
Lighting Efficiency:	up to 105Lm/W
Power Factor:	>0.95
Beam Angle:	120°
IK rating [Input Resistance]:	IK08 [Protection against 5 joule impact]
IP rating:	IP66
Warranty:	7 years
Net Weight:	2.4kg
Product Size:	1160mm [L] x 120mm [W] x 108mm [H]
Fixing Hole Centre:	770mm
Maximum Luminaires per circuit [Typical] Type C 16A:	48
Operating temperature:	-20°C to +50°C
Battery Warranty:	12 Months
Battery type:	Ni-CD, 7.2V, 1.5Ah
Emergency Classification:	C0- C100; C90- C100

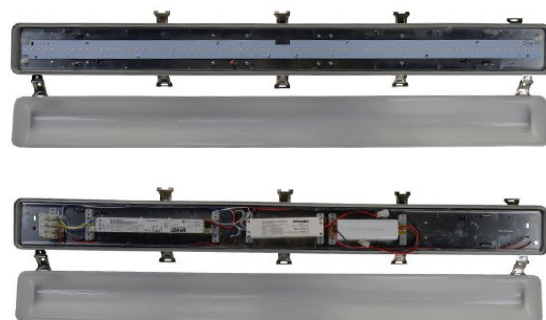

Compliance

ROHS
 EN62471
 ISO 9001:2008

