



WPP2H



WPP2HSB

TECHNICAL SPECIFICATIONS



Product Code	Mounting Block	IP Rating	Current Rating	Colour
WPP2H	Standard	IP53	10A	White
WPP1H	Standard	IP53	10A	White
WPP2HS	Slim	IP53	10A	White
WPP1HS	Slim	IP53	10A	White
WPP2H-15	Standard	IP53	15A	White
WPP1H-15	Standard	IP53	15A	White
WPP2H-54	Standard	IP54	10A	White
WPP2HS-54	Slim	IP54	10A	White
WPP2HX	Standard	IP53	10A Extra switch rated to 10A	White
WPP2HSX	Standard	IP53	10A Extra switch rated to 10A	White
WPP2HB	Standard	IP53	10A	Gloss Black
WPP2HSB	Slim	IP53	10A	Gloss Black

TECHNICAL SPECIFICATIONS

Materials	Polycarbonate UV Stabilised Fire Retardant
Description/ Technical Data	Safety Shutters Terminal Dimensions: 5.5mm x 6mm [suits 4 x 2.5mm ² cable] Conduit entries: 4 x 25mm push-in 1 x 25mm screwed on sides. 1 X 25mm entry on rear
Installation	1 x Plain Reducer 25/20 included All entries should be silicone sealed to maintain IP rating Pips must be fitted to maintain IP rating Install vertically with sockets facing down Cover screws should be tightened to 0.6Nm Terminal tightness: 2Nm recommended
Compliance	AS/NZS 3112:2011 Inc A1
Warranty	25 Years

DIMENSIONS

STANDARD

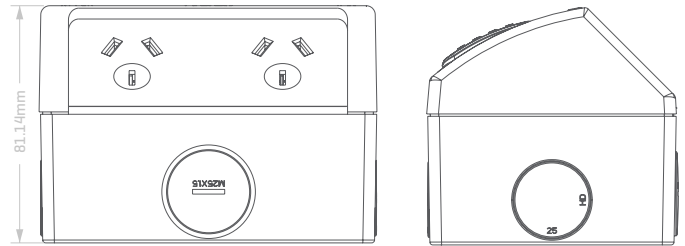

SLIM

