




Technical Specifications:

Degree of Protection	IP65
Resistance to Impact	IK08
Auto-extinguishing degree	HB [UL94]
Test of resistance to glow wire in the base	650°
Ball pressure test	70°
Room temperature range	-25°C / +40°C
Maximun operating voltage	1000VAC / 1500VDC
Double insulation	ClassII
Case + Frame Material	Halogen Free ABS
Window Material	Smoky Transparent polycarbonate

Dimensions:

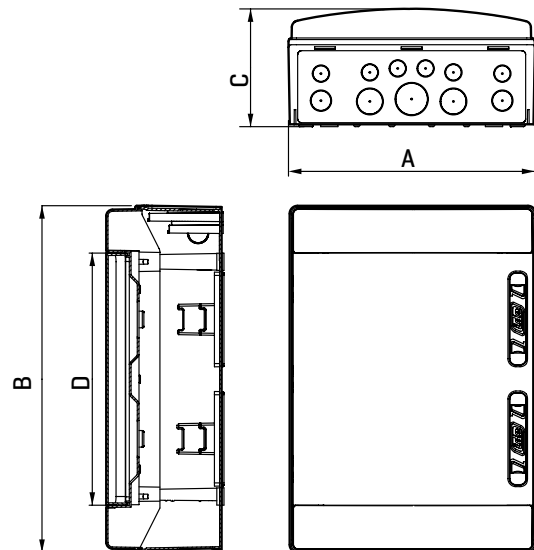

Dimensions Chart:

Product Code	A (mm)	B (mm)	C (mm)	D (mm)	Earth Bar	Neutral Bar
WSBS-6	202	231	113	150	1x[1x7.4mm, 4x4.5mm, 3x5.3mm]	1x[1x7.4mm, 4x4.45mm, 3x5.3mm]
WSBS-8	238	231	118	150	1x[1x7.4mm, 5x4.5mm, 3x5.3mm]	1x[1x7.4mm, 5x4.5mm, 3x5.3mm]
WSBS-12	310	246	148	167	1x[2x7.4mm, 6x4.5mm, 6x5.3mm]	1x[2x7.4mm] 1x[3x4.5mm, 2x5.3mm] 1x[2x4.5mm, 2x5.3mm] 1x[2x4.5mm, 3x5.3mm]
WSBS-18	418	286	148	167	1x[2x7.4mm, 8x4.5mm, 8x5.3mm]	1x[2x7.4mm, 8x4.5mm, 8x5.3mm]
WSBS-24	310	436	148	317	1x[2x7.4mm, 12x4.5mm, 12x5.3mm]	2x[2x7.4mm, 6x4.5mm, 5x5.3mm] 1x[3x4.5mm, 2x5.3mm]
WSBS-36	418	436	148	317	1x[2x7.4mm, 12x4.5mm, 12x5.3mm]	1x[2x7.4mm, 3x4.5mm, 3x5.3mm] 2x[2x7.4mm, 6x4.5mm, 5x5.3mm] 1x[3x4.5mm, 2x5.4mm]

7.4mm will take 25mm² cable
5.3mm will take 16mm² cable

4.5mm will take 10mm² cable
Terminal holes details exclude terminals used for MEN Link

Compliance:

EN 62208
VDE0660-511

IEC6439-1
EN60670-24

IEC60529
IEC60695-2-12

