




Technical Specifications :

Degree of Protection:	IP65
Resistance to impact:	IK08
Auto-extinguishing degree:	HB [UL94]
Test of resistance to glow wire in the base:	650°C
Ball pressure test:	70°C
Room temperature range:	-25°C / +40°C
Maximum operating voltage:	1000VAC / 1500VDC
Double insulation:	Class II
Case + Frame Material:	Halogen Free ABS
Window Material:	Smoky Transparent polycarbonate

Dimensions:

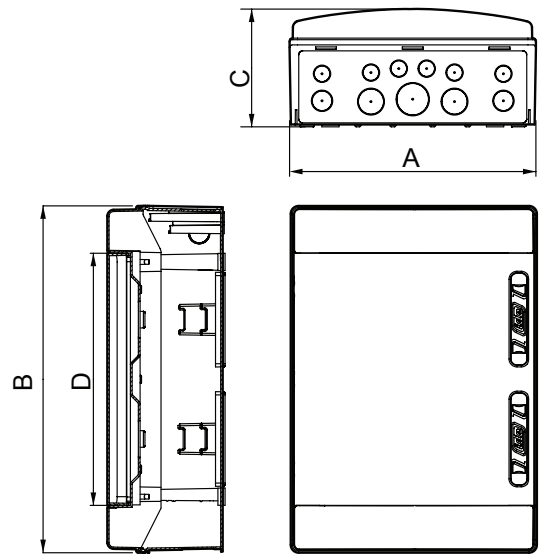

Compliance:

EN 62208	IEC61439-1	IEC60529
VDE0660-511	EN60670-24	IEC60695-2-12

Product Code	A [mm]	B [mm]	C [mm]	D [mm]	Earth Bar	Neutral Bar
WSBS-6	202	231	113	150	1x[1x7.4mm, 4x4.5mm, 3x5.3mm]	1x[1x7.4mm, 4x4.5mm, 3x5.3mm]
WSBS-12	310	246	148	167	1x[2x7.4mm, 6x4.5mm, 6x5.3mm]	1x[2x7.4mm] 1x[3x4.5mm, 2x5.3mm] 1x[2x4.5mm, 2x5.3mm] 1x[2x4.5mm, 3x5.3mm]
WSBS-24	310	436	148	317	1x[2x7.4mm, 12x4.5mm, 12x5.3mm]	2x[2x7.4mm, 6x4.5mm, 5x5.3mm] 1x[3x4.5mm, 2x5.3mm]
WSBS-36	418	436	148	317	1x[2x7.4mm, 12x4.5mm, 12x5.3mm]	1x[2x7.4mm, 3x4.5mm, 3x5.3mm] 2x[2x7.4mm, 6x4.5mm, 5x5.3mm] 1x[3x4.5mm, 2x5.4mm]

7.4mm will take 25mm² cable
5.3mm will take 16mm² cable

4.5mm will take 10mm² cable
Terminal hole details exclude terminals used for MEN Link

