

# VOLTEX<sup>®</sup>

## PRODUCT DATA SHEET

# Voltex ARMA MCB 4.5/6/ 10kA



1 Pole and 3 Pole



1 POLE

**\*RED LEVERS ONLY  
AVAILABLE IN  
32A & 63A**


### TRIPPING CHARACTERISTIC CURVES

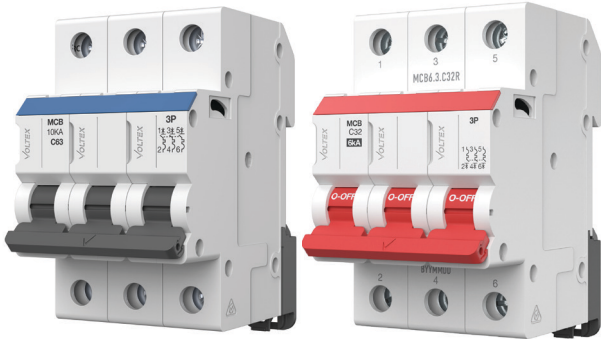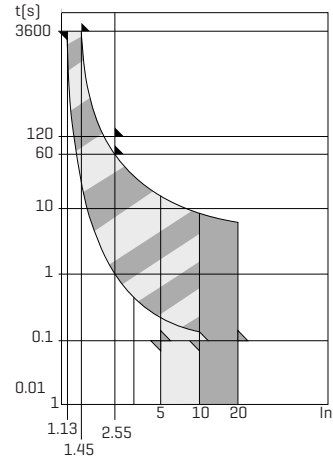

3 POLE

**\*RED LEVERS ONLY  
AVAILABLE IN  
32A & 63A**

### WIRING DIAGRAM

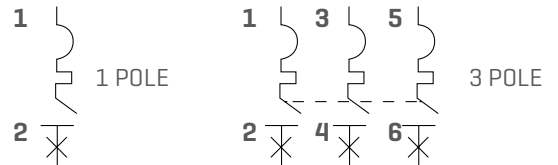

### TECHNICAL SPECIFICATIONS

Rated Current	6A, 10A, 13A, 16A, 20A, 25A, 32A, 40A, 50A, 63A
Rated Voltage	230VAC & 230/415VAC
Number of Poles	1P, 3P
Module Size	1M, 3M
Curve Type	C-Curve & D-Curve
Breaking Capacity	4.5kA, 6kA & 10kA
Optimum Operating Temperature	-5°C to 40°C
Terminal Tightening Torque	2.5N/m
Terminal Capacity [top]	Up to 35mm <sup>2</sup>
Terminal Capacity [bottom]	Up to 35mm <sup>2</sup>
Busbar	1 Pole: BUS.1P.18M, BUS.1U.12M, BUS.1U.18M, 3 Pole: BUS.3U.4M, BUS.3U.6M, BUS.3U.18M, BUS.3P.6M
Compliance	AS/NZS 60898.1
Warranty	25 Years

### DIMENSIONS

