




**Technical Specifications:**

|                       |   |
|-----------------------|---|
| Voltage:              | 3 Round Pin 250V AC<br>4,5 Round Pins 500V AC |
| Amp:                  | 10A, 20A, 32A, 40A, 50A                       |
| Straight Plug Pin No: | 3, 4, 5 Round Pins                            |
| Angled Plug Pin No:   | 4, 5 Round Pins                               |
| IP Rating:            | 66  |
| Body Material:        | Polycarbonate                                 |

**Pin Configurations:**

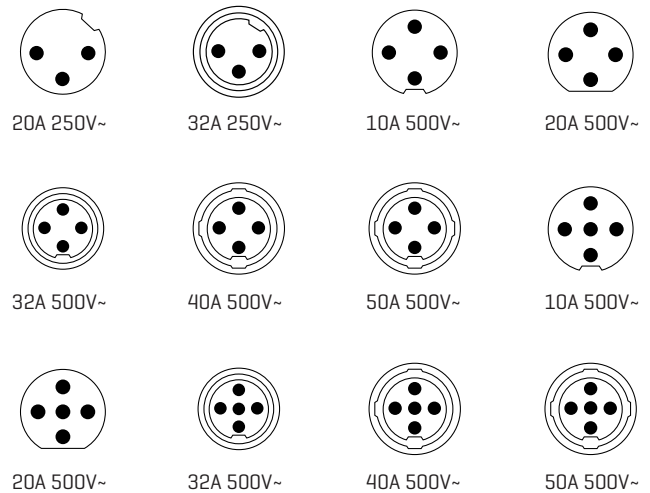

| Pin & Volt  | Cat No. Straight Plug | Cat No. Angle Plug | Current Rating [A] | Pin Config | Terminal Size [mm dia] | Maximum Conduct Size [mm <sup>2</sup> ] | Minimum Cable Diameter [mm <sup>2</sup> ] | Maximum Cable Diameter [mm <sup>2</sup> ] | Gland Nut Thread [mm] |
|-------------|-----------------------|--------------------|--------------------|------------|------------------------|---|---|---|-----------------------|
| 3 Pin 250V~ | C66P320               |                    | 20                 | 3 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
|             | C66P332               |                    | 32                 | 3 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
| 4 Pin 500V~ | C66P410               | C66PA410           | 10                 | 4 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
|             | C66P420               | C66PA420           | 20                 | 4 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
|             | C66P432               | C66PA432           | 32                 | 4 Round    | 4.1                    | 10                                      | 9   | 28  | M32 x 1.5             |
| 5 Pin 500V~ | C66P510               | C66PA510           | 10                 | 5 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
|             | C66P520               | C66PA520           | 20                 | 5 Round    | 4.1                    | 10                                      | 7   | 16  | M25 x 1.5             |
|             | C66P532               | C66PA532           | 32                 | 5 Round    | 4.1                    | 10                                      | 9   | 28  | M32 x 1.5             |

**Compliance:**

AS/NZS 3123  
With AS/NZS 3100 +A1 + A2 + A3

